


EcoStor2™ SC Solar Indirect System Single Coil Eco-Defender Gas Backup Models



Photo is of
S-DW2-U65T6FRN

FEATURING:



6 Year Limited Tank Warranty / 6-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

The EcoStor2™ Single Coil Eco-Defender Safety System® Models feature:

- **Backup Ultra Low NOx Burner**—Meets the most stringent air quality requirements for allowable NOx emissions in the country. To activate burner, a thermistor temperature sensor is located in the upper portion of the tank to promote greater solar operation efficiency.
- **Internal Double Wall Heat Exchanger**—1½" O.D. glass coated (Vitrarglas®) steel coil ensures separation of potable water and heating fluid.
 - ¾" NPT Solar Collector Supply and Return Connections.
- **Sensor Wires for Solar Thermistor Connections**—Twisted wires are provided under the Upper and Lower covers (Thermistors and Solar Controller are not provided).
- **Honeywell Self Diagnostic Gas Control**—Intelligent gas control with proven millivolt powered technology and built-in Piezo igniter. A standard, off the shelf thermopile converts heat energy from the pilot flame into electrical energy to operate the gas valve and microprocessor. No need for external electricity.
 - **Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain accurate water temperature levels.
 - **Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides ten different diagnostic codes to assist in troubleshooting.
 - **Pilot On Indication**—Flashing green LED provides positive indication that pilot is on.
- **Eco-Defender Safety System®**.
 - **Advanced ScreenLok® Technology Flame Arrestor Design**—Flame arrestor is designed to prevent ignition of flammable vapor outside of the water heater.
 - **Digital Thermal Sensor and Resettable Thermal Switch**—Coordinates with self diagnostic control to prevent water heater operation as needed.
 - **Maintenance Free**—No regular cleaning of air inlet openings or flame arrestor is required under normal conditions.
 - **Sight Window**—Offers a view into the combustion chamber to observe the operation of the pilot and burner.
- **Factory Installed Hydrojet® Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank and increases first hour delivery of hot water while minimizing temperature build up in tank.
- **Vitrarglas® Lining**—Bradford White tanks are lined with an exclusively engineered enamel formula that provides superior tank protection from the highly corrosive effects of hot water. This formula (Vitrarglas®) is fused to the steel surface by firing at a temperature of over 1600°F (871°C).
- **2" Non-CFC Foam Insulation**—Covers the sides and top of tank, reducing the amount of heat loss. This results in less energy consumption, improved operation efficiencies and jacket rigidity.
- **Water Connections**—¾" NPT factory installed true dielectric fittings.
- **Two Protective Anode Rods**.
- **T&P Relief Valve**—Included.
- **Low Restriction Brass Drain Valve**—Durable tamper proof design.
- **Complies with the latest ultra-low NOx requirement (10 ng/J NOx limit).**
- **Thermostatic Mixing Valve (ASSE Approved)**—Included.

EcoStor2™ Indirect Water Heater System

Single Coil Gas Backup Models

NATURAL GAS AND LIQUID PROPANE GAS


Meet or exceed ASHRAE 90.1b (current standard)
80% Recovery Efficiency

| Model Number | Capacity | | Recovery at 90°F Rise* | | A Floor to Flue Conn. | B Jacket Dia. | C Vent Size | D Floor to T&P Conn. | E Floor to Gas Conn. | F Floor to Top of Heater | G Floor to Water Conn. | H Floor to Solar Collector Supply in. | J Floor to Solar Collector Return in. | K Depth | Approx. Shipping Weight | |
|----------------|----------------|------|------------------------|---------------|-----------------------|---------------|-------------|----------------------|----------------------|--------------------------|------------------------|---------------------------------------|---------------------------------------|---------|-------------------------|-----|
| | U.S. Imp. Gal. | Gal. | Nat. U.S. GPH | Nat. Imp. GPH | in. | in. | in. | in. | in. | in. | in. | in. | in. | in. | lbs. | |
| S-DW4-U5036FRN | 45 | 38 | 40,000 | 43 | 36 | 59 1/4 | 22 | 3 | 50 | 11 5/8 | 56 1/4 | 60 | 32 1/4 | 10 1/8 | 26 | 233 |
| S-DW2-U65T6FRN | 60 | 50 | 55,000 | 57 | 47 | 63 | 24 | 4 | 53 1/2 | 11 5/8 | 59 1/2 | 63 1/4 | 32 1/4 | 10 1/8 | 28 | 272 |

| Model Number | Capacity | | Recovery at 50°C Rise* | | A Floor to Flue Conn. | B Jacket Dia. | C Vent Size | D Floor to T&P Conn. | E Floor to Gas Conn. | F Floor to Top of Heater | G Floor to Water Conn. | H Floor to Solar Collector Supply mm. | J Floor to Solar Collector Return mm. | K Depth | Approx. Shipping Weight |
|----------------|----------|--|------------------------|-------------------|-----------------------|---------------|-------------|----------------------|----------------------|--------------------------|------------------------|---------------------------------------|---------------------------------------|---------|-------------------------|
| | Liters | | Nat. kW Input | Nat. Liters/ Hour | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | mm. | kg. |
| S-DW4-U5036FRN | 170 | | 19.1 | 163 | 1505 | 559 | 76 | 1270 | 295 | 1429 | 1524 | 819 | 257 | 660 | 106 |
| S-DW2-U65T6FRN | 227 | | 19.1 | 216 | 1600 | 610 | 102 | 1359 | 295 | 1511 | 1607 | 819 | 257 | 711 | 123 |

All models comply with the latest ultra-low NOx requirement of 10 ng/J or less.

*Based on manufacturers rated recovery efficiency.

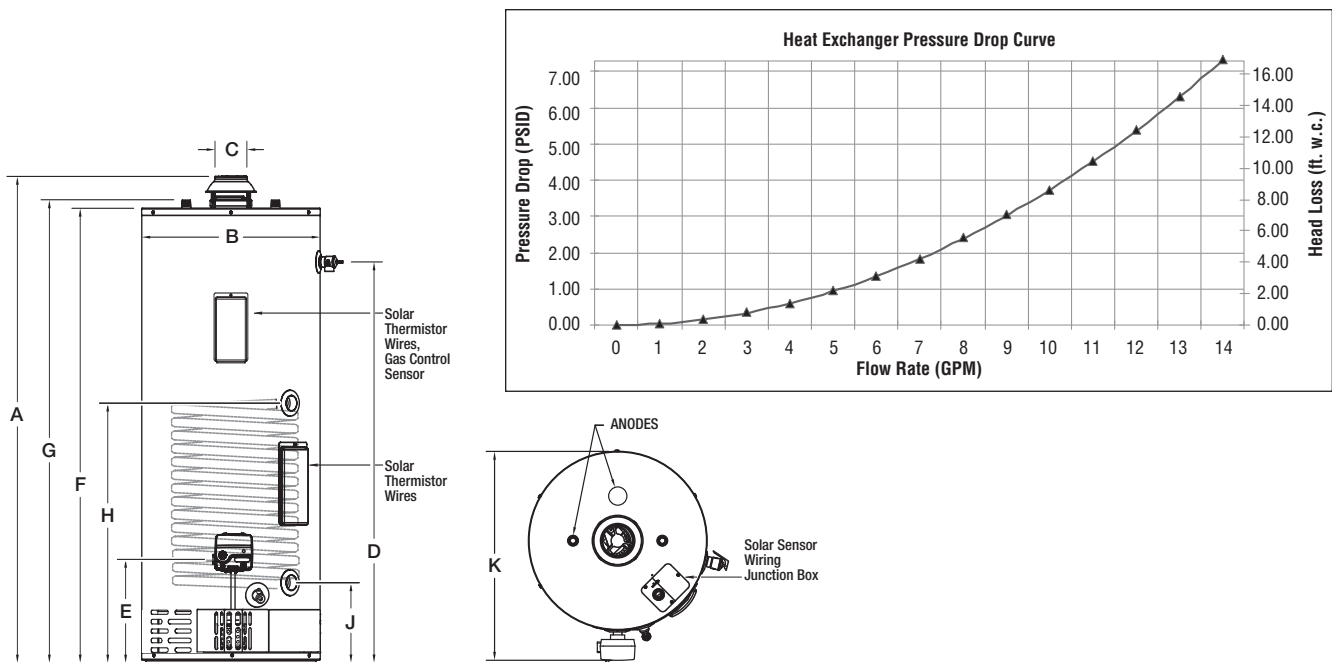

General

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All potable water and electrical connections are 3/4" NPT (19mm) on 11" (279mm) centers. All models design certified by CSA International (formerly AGA/CGA), ANSI Z-21.10.1 and peak performance rated.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into the potable side of this system. The potable side may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.



Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com

BRADFORD WHITE-CANADA INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2014, Bradford White Corporation. All rights reserved.